



Studio Face, Brushed Nickel (864, 564) Installation Instructions

Packing List

- Face Trim (3 or 4 Pieces)
- (6) #8 x 1" Screws
- (4) Drywall Screws
- (6) Double-Sided Foam Tape
- 9/64" Drill Bit
- (4) Drywall Anchors
- (2) Mounting Brackets
- Trim Hardware ("L" Brackets, Set Screws)

SKU's

864 3-Sided 95800644
864 4-Sided 95800645


564SS 3-Sided 95400421
564SS 4-Sided 95400422

Compatibility

The studio face fits over the front of the fireplace, concealing the drywall edge around the perimeter of the fireplace and eliminating the need for tile. This face works in conjunction with the standard grills.

Face Installation Details

The studio face fits over the front of the fireplace, around the perimeter of the glass frame and grill openings (the "tile line"). The face extends 115mm from the tile line on the top and sides. The 3-sided face extends to a location 25mm above the base of the fireplace, allowing for a 25mm hearth to be installed below the face. The 4-sided face extends 115mm below the base of the fireplace. The fireplace must be raised a minimum 115mm for 4-sided faces.

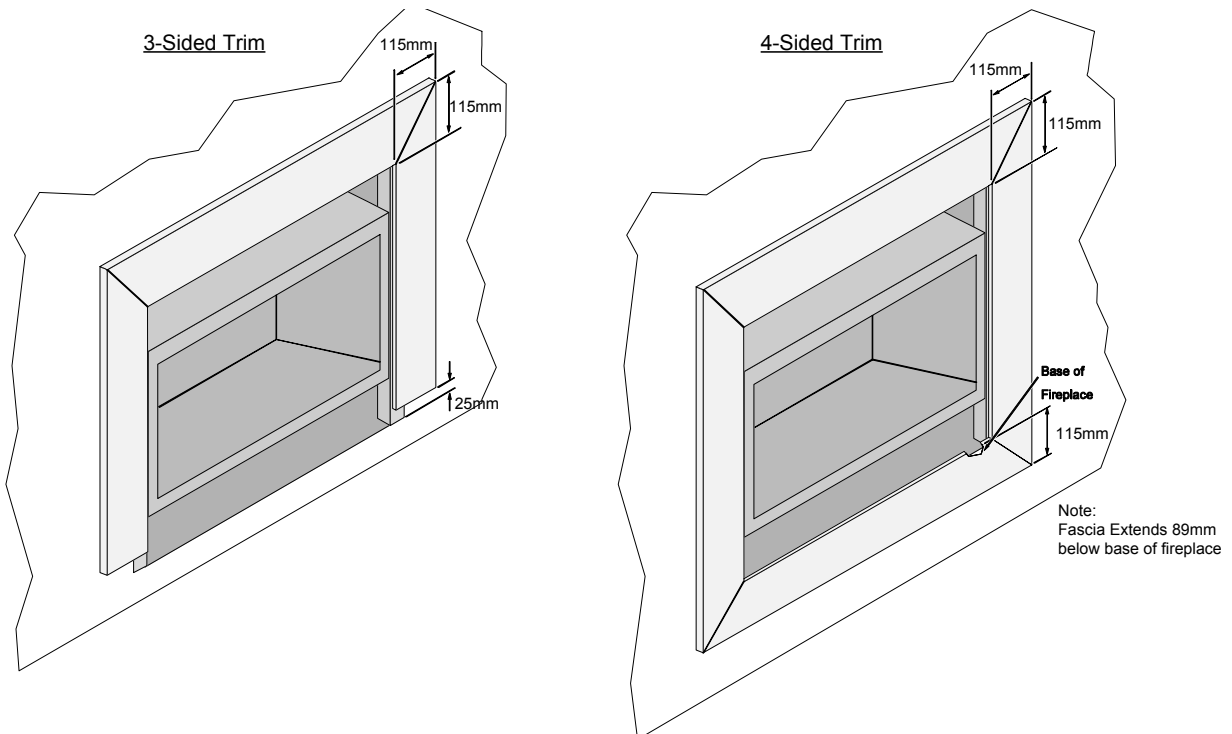

Face	Width	Height
564 3-Sided	1060mm	819mm
564 4-Sided	1060mm	937mm
864 3-Sided	1175mm	985mm
864 4-Sided	1175mm	1102mm